


Oilfield Pumps — Frac & Well Service

Triplex

AFP-3000 (114~1,374 GPM)

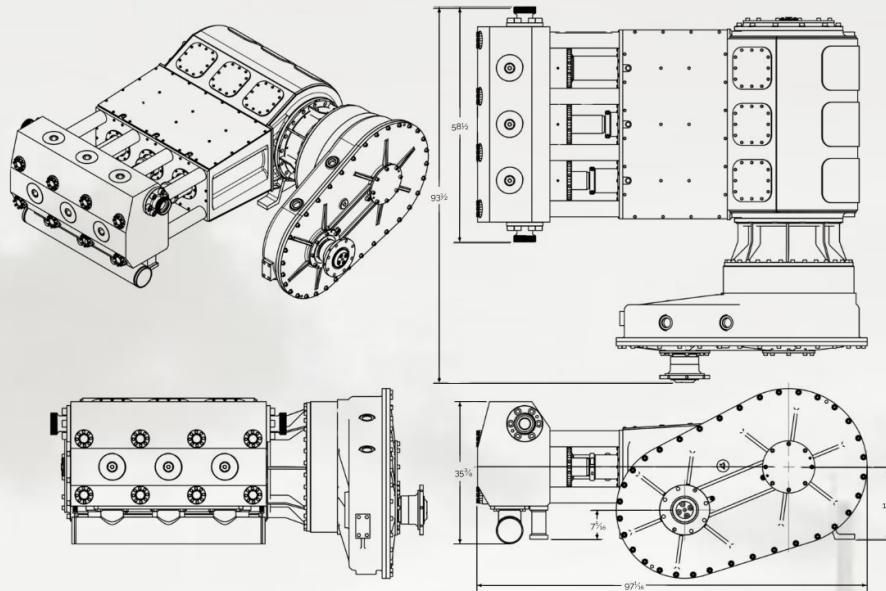

Technical specification data

Maximum input HP rating	3000 HP
Maximum strokes per minute	250
Stroke length	11"
Maximum plunger size	7"
Maximum rod load	345,542 Lbs
Weight	18,600 Lbs
High gear ratio	7.842: 1
Overall dimensions (L x W x H)	97.062" x 93.50" x 35.375"

AFP-3000 High Performance 11" Stroke Triplex	S.P.M. Input Hp*	50		100		150		200		250	
		1600		3000		3000		3000		3000	
Plunger Size	Output	PSI**	GPM	PSI**	GPM	PSI**	GPM	PSI**	GPM	PSI**	GPM
7"	5.498	8,979	275	8,418	550	5,612	825	4,209	1,100	3,367	1,374
6 1/2"	4.740	10,413	237	9,762	474	6,508	711	4,881	948	3,905	1,185
6"	4.039	12,221	202	11,457	404	7,638	606	5,729	808	4,583	1,010
5 1/2"	3.394	14,544	170	13,635	339	9,090	509	6,818	679	5,454	849
5"	2.805	17,598	140	16,498	281	10,999	421	8,249	561	6,599	701
4 1/2"	2.272	20,000	114	20,000	227	13,579	341	10,184	454	8,147	568

* Based on 90% mechanical efficiency, **Based on 100% volumetric efficiency.