


Oilfield Pumps — Drilling and Workover

Triplex

AMP-2200 (268-1,126 GPM)

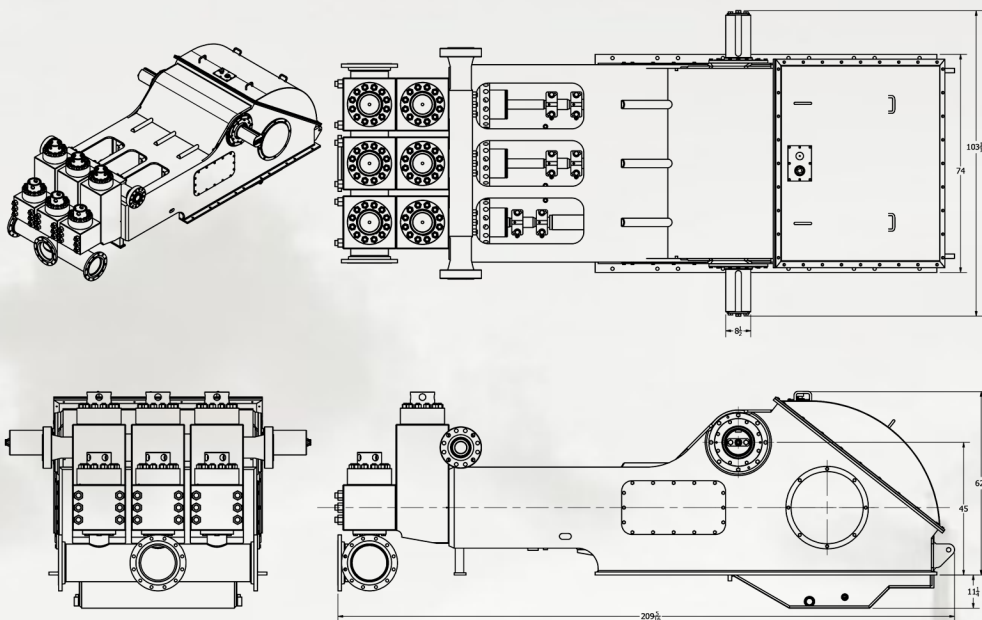

Technical specification data

Maximum input HP rating	2200 HP
Maximum strokes per minute	115
Stroke length	15"
Maximum piston size	8"
Fluid end working pressure	7,500 PSI
Discharge connection size	5" Flange
Suction connection size	12" Flange
Crankcase oil capacity	185 Gallons
Linerwash capacity	100 Gallons
Weight	61,250 Lbs
Internal gear ratio	4.843: 1
Overall dimensions (L x W x H)	209.312" x 103.687" x 62.25"

AMP-2200 High Performance 15" Stroke Triplex			S.P.M.	70	80	90	100	110	115
			Input Hp**	1339	1530	1722	1913	2104	2200
Piston/ Plunger Size	Discharge Pressure	Output Gal/Rev.	Output – Gallons Per Minute*						
8"	3,181	9.792	685	783	881	979	1077	1126	
7 1/2"	3,619	8.606	602	689	775	861	947	990	
7"	4,155	7.497	525	600	675	750	825	862	
6 1/2"	4,819	6.464	452	517	582	646	711	743	
6"	5,655	5.508	386	441	496	551	606	633	
5 1/2"	6,730	4.628	324	370	417	463	509	532	
5"	7,500*	3.825	268	306	344	383	421	440	

* Based on 95% mechanical efficiency, **Based on 100% volumetric efficiency.